

Assessment of the Physicochemical Quality of Well Water in Okene and Adavi Local Government Areas of Kogi State, Nigeria

¹Etudaye, U., ²Upahi, L.,

¹National Biotechnology Research and Development Agency, Abuja, Nigeria

²Department of Biology, Confluence University of Science and Technology, Osara, Kogi state, Nigeria upahietudaye@yahoo.com

ABSTRACT

This study investigated the physicochemical properties of well water sources from Okene and Adavi Local Government Areas of Kogi State, Nigeria. Samples were collected during the dry and wet seasons from ten (10) sample locations within the study area using a simple random sampling method. The wells were categorized by determining the type of well, including the proximity of the wells to a septic tank, the presence of good casing with well cover, the presence of animals/waste around the well, and the topography of the well. Physicochemical parameters of the well water sources were assessed. Only 13% (5) of the wells surveyed conform to World Health Organization standards concerning the distance between the well and the septic tank. The physicochemical properties were within the permissible range as specified by WHO. However, there were statistical differences in the mean values obtained between the sample locations concerning some of the physicochemical parameters such as temperature (P-value 0.007), pH (P-value 0.045), turbidity (P-value 0.013), total suspended solids (P-value 0.001), chloride content (P-value 0.016), total dissolved solids (P-value 0.588), electrical conductivity (P-value 0.931) and total alkalinity (P-value 0.566). The study revealed that hygienic practices around the wells in Okene and Adavi local government areas of Kogi State, Nigeria were poor and the siting of the wells was not in conformity with WHO standards. However, the physicochemical Parameters are relatively within the limits specified by WHO and NAFDAC. It was recommended that the inhabitants of the study area should not consume well water without treatment. Also, wells should be constructed properly with cemented walls, and well casing and situated far away from livestock and domestic animals, gutters, latrines, soak – away and other sources of contamination.

ARTICLE INFO

Article History

Received: August, 2024

Received in revised form: October, 2024

Accepted: November, 2024

Published online: December, 2024

KEYWORDS

Well, Water, Physicochemical, Permissible, Temperature, pH.

INTRODUCTION

Water, which makes up almost 75% of the earth's surface, is the most important chemical component for all life forms on the planet (EL-Jakee *et al.*, 2009). However, just 2.5% of the total volume is fresh water, with the remaining 97.5% being saline water. 98.8% of the fresh water is inaccessible because it is frozen or too deep beneath. Humans can use just 1.2% of the fresh water on Earth (Hongeu *et al.*, 2013). However, a variety of variables and activities frequently jeopardize the quality and

potability of this small amount that is naturally available for human use, thus limiting human availability (Bassem, 2013).

Water is sourced by most communities in Nigeria from streams, rivers, boreholes and wells (Shittu *et al.*, 2008). The safety of drinking water for the people of Okene-Adavi locality as in other parts of the state has been a major cause for concern. Majority of the population depend on well water sources for their water supply. However, the physicochemical quality of well water sources in this

Corresponding author: Etudaye, U.

✉ upahietudaye@yahoo.com

National Biotechnology Research and Development Agency, Abuja, Nigeria.

© 2024. Faculty of Technology Education. ATBU Bauchi. All rights reserved.

locality has so far not been adequately assessed and reported. Potable water that is fit for human consumption deserves special attention because of its implication on public health and quality of life.

The World Health Organization believes that 80% of health issues in developing nations are related to water and sanitation. In many countries, including Nigeria, bacterial illnesses have been greatly exacerbated by contaminated water supplies (Ahmed *et al.*, 2013). In many places in Nigeria, including the local government districts of Okene and Adavi in Kogi state, there is a lack of recorded information on the prevalence rates of water-borne illnesses that are directly linked to well water.

There is an increasing demand for potable water in Nigeria and the inadequacy of the supply especially in Okene and Adavi local Government areas makes it imperative that any available source is carefully protected and monitored. Therefore, this study is aimed at assessing the physicochemical quality of well water in Okene and Adavi local Government areas of Kogi state.

MATERIALS AND METHOD

Description of Study Area

The study area was Okene and Adavi Local Government Areas of Kogi State, Nigeria. Whereas, Okene local government area is located on the A² high way, upon the coordinates 7° 33' N 6° 14' E with a land mass of 328km² and a population of 320,260, Adavi local government area is located on A¹²³ highway upon 7° 36' 05" N 6° 12' 01" E with a land mass of 718km² and a population of 202, 194 according to 2006 population census. The sources of water for consumption in this locality include lake, reservoir, well and a handful of boreholes which are sparsely distributed. Majority of the population depend on well water as their main source of water for drinking, cooking and for other domestic activities. Ten sample locations were selected across the study area and they include: Okene Local Government Area; Okene Central, Obehira, Agassa, Okengwe Central, Ageva and Adavi Local Government Area; Nagazi, Ogamina Central, Kabba Junction, Adavi Central, Irigony.

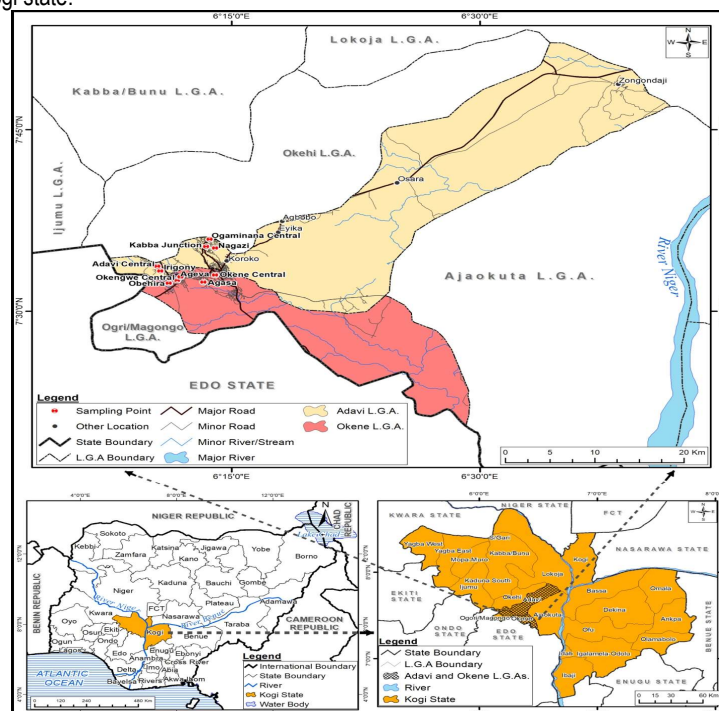



Figure 1: A Map Showing Sampling Points in Adavi and Okene L. G. As of Kogi state

Corresponding author: Etudaye, U.

✉ upahietudaye@yahoo.com

National Biotechnology Research and Development Agency, Abuja, Nigeria.

© 2024. Faculty of Technology Education. ATBU Bauchi. All rights reserved.



Collection of Samples

Four (4) wells were sampled in triplicates from each of the ten (10) sample locations distributed across the two local governments that made up the study area. That is, a total of twenty (20) wells were sampled from each of the two local government areas making a total of forty wells sampled for this study. Equal number of samples (120 samples) was collected from the sample locations in both dry and wet seasons making a total of two hundred and forty (240) samples.

Water samples were collected aseptically in 500ml sterile bottles tied with a strong string to a piece of metal (500g) as the weight. The sterile bottle cap was removed and the weighted bottle lowered into the well to a depth of about 1-2 m. When no more air bubbles were seen, the filled bottle was brought to the surface and covered with the bottle cap aseptically. They were labelled and transported in ice packs to the laboratory for analysis (Aboh *et al.*, 2015).

Categorization of Wells into Different Types

The distance between the well and septic tanks, topography of the well, presence or absence of animal dung/ human faeces, presence of well casing, presence of well cover, whether the well is raised above the soil surface or not and the use to which the well is committed were determined. Distances were measured with the aid of a measuring tape while the other observation were done physically and through administration of questionnaire. (Olukosi *et al.*, 2008)

Determination of Physicochemical Parameters

Physicochemical parameters such as Temperature, pH, Turbidity, Total Dissolved Solid, Total Suspended Solid, Total alkalinity, Electrical Conductivity and Chloride Content were determined using the guideline as provided in (APHA) American Public Health Association Manual "standard method for

examination of water and waste water. The pH was measured instrumentally using pocket size pH meter Hanna instrument, the electrical conductivity using conductivity meter of model DDS 307, temperature with hand held thermometer, Total Dissolved Solid, Total Suspended Solid, Turbidity, Total Alkalinity and Chloride content were measured using appropriate Hanna Combo instrument (Aremu *et al.*, 2011)

Analysis of data

Results obtained were presented in tables. Post hoc analysis was also carried out using Turkey HSD with the aid of Graph Pad prism 8.0.2 scientific statistical package.

RESULT

Well water types with respect to WHO standard in Okene and Adavi Local Government Areas of Kogi State

The form, structure and activities observed around the wells surveyed showed that 58% (23) of the wells had presence of faeces, animals and their waste around the well while 42% (17) had neither faeces, nor animal presence or their waste around the well. A total of 98% (39) had well casing while only 2% (1) had no casing. About 78% (31) had well cover while the remaining 22% (9) had no cover. Whereas, 91% (36) had their casing slightly raised above the ground with cover, the remaining 9% (4) were not raised above the ground level. Twenty-six percent (10) were on a higher topography compare to the location of the septic tank while the rest 74% (30) were either on the same plane ground or on a lower topography with respect to the location of the septic tank. Only thirteen percent (5) of the forty wells sampled were up to thirty metres (30M) away from septic tanks and therefore complied with World Health Organisation's Standard while the remaining 87% (35) fail to comply with the set standard by World Health Organisation shown in as shown Fig1.

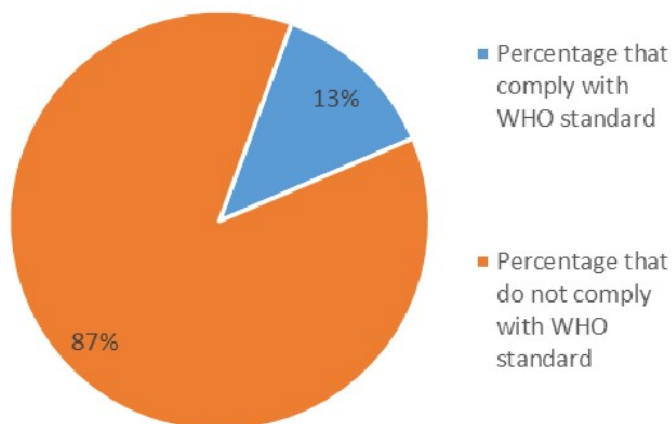


Figure 2: Percentage of Wells that Conform to WHO Standard
Key: WHO standard: Distance between the well and septic tank should be $\geq 30M$

Physicochemical Parameters

Table 1 shows the mean values of the physicochemical parameters of well water samples from the ten sample locations as obtained during the dry season. It is evidently clear from the table that, there was no significant difference in the pH, temperature, turbidity and electrical conductivity of the well water samples collected from the different sample locations. However, whereas, pH, turbidity and electrical conductivity are within the limit specified by NAFDAC, the temperature values differ slightly as it exceeded the limit posited by NAFDAC.

There was significant difference observed in the total dissolved solid, total suspended solid, total alkalinity and chloride content but all were within the permissible limits of NAFDAC. However, sample from Nagazi location had a value $548.00 \pm 6.65 \text{mg/L}$ for TDS which is higher than the permissible limit set by NAFDAC.

Table 2 shows the mean values of the physicochemical parameters of well water samples from the ten sample locations as obtained during the wet season. The result reveal that, there were significant differences in the total dissolved solid of the well water

samples from different sample locations. However, the values were within NAFDAC permissible limits.

There were no significant differences in the values obtained for Temperature, pH turbidity, electrical conductivity, total suspended solid, total alkalinity and chloride content. However, pH, electrical conductivity, total suspended solid, total alkalinity and chloride content were within NAFDAC permissible limits but temperature slightly exceeded the permissible limit while water samples collected from Ageva, Agasa, Okene central, Adavi central and Kabba junction area had mean values that exceeded NAFDAC permissible limits for turbidity.

Table 3 shows the effects of seasonal variation on the mean values of physicochemical parameters of well water from Okene and Adavi Local Government Areas of Kogi State. Whereas, there were no significant differences statistically in the electrical conductivity, total alkalinity and total dissolved solid between the two seasons, there was a marked significant difference in the total suspended solid, chloride content, turbidity, temperature and pH between the two seasons.



Table 1: Comparison of mean values of Physicochemical Parameters of Well Water in Okene and Adavi Local Government Areas of Kogi State during dry season

	<u>Okengwe</u> Central	<u>Obehira</u>	<u>Ageva</u>	<u>Agasa</u>	<u>Okene</u> Central	<u>Irigony</u> (Adavi)	<u>Adavi</u> central	<u>Kabba</u> Junction Area	<u>Nagazi</u>	<u>Ogaminana</u> Central
Temp (°C)	27.5±0.36 ^a	26.25±0.18 ^a	26.42±0.19 ^a	26.58±0.15 ^a	26.67±0.19 ^a	27.00±0.12 ^a	26.58±0.19 ^a	26.58±0.19 ^a	26.42±0.19 ^a	26.25±0.13 ^a
pH	7.4±0.10 ^a	6.65±0.34 ^a	6.77±0.09 ^a	7.80±0.04 ^a	7.34±0.14 ^a	6.78±0.10 ^a	7.04±0.09 ^a	7.28±0.04 ^a	7.55±0.07 ^a	7.14±0.03 ^a
Turbidity NTU	1.0±0.21 ^a	0.71±0.49 ^a	0.7±0.07 ^a	0.63±0.14 ^a	1.55±0.64 ^a	0.38±0.05 ^a	3.84±1.27 ^a	0.55±0.07 ^a	0.63±0.22 ^a	1.08±0.55 ^a
Total Dissolved Solid	252.2±1.47 ^f	524±1.22 ^b	160.25±3.53 ^h	427.75±1.80 ^c	434.50±7.45 ^c	270.58±7.58 ^b	153.17±3.89 ^b	340.17±5.49 ^d	548.00±6.56 ^a	341.83±6.82 ^e
Electrical Conductivity	0.2925±0.05 ^a	0.10±0.15 ^a	0.18±0.03 ^a	0.43±0.05 ^a	0.57±0.06 ^a	0.27±0.04 ^a	0.23±0.02 ^a	0.27±0.03 ^a	1.33±0.61 ^a	0.49±0.07
Total Suspended Solid	10.97±0.46 ^a	2.25±0.18 ^b	2.5±0.36 ^c	2.50±0.23 ^c	4.08±0.15 ^c	3.32±0.39 ^c	3.17±0.58 ^c	2.62±0.38 ^c	2.25±0.13 ^d	3.05±0.30 ^c
Total Alkalinity	42.34±0.75 ^b	27.17±7±0.30 ^d	25.75±0.43 ^d	37.92±0.97 ^c	26.42±0.85 ^e	26.42±0.38 ^e	25.50±0.82 ^e	24.67±0.91 ^e	37.68±3.05 ^c	45.08±0.62 ^a
Chloride Content	30.33±0.10 ^b	25.94±0.30 ^b	16.15±0.84 ^c	28.27±0.79 ^b	15.63±0.67 ^c	33.25±0.96 ^b	14.83±0.71 ^c	16.11±0.98 ^c	43.58±0.98 ^a	24.33±0.93 ^c

Key: P- value = < 0.001 α = 0.05 means with different superscript alphabets across the row are significantly (p≤0.05) different
 WHO permissible limits; Tem≤ 40°C, pH≤ 8.5, Turb≤ 5NTU, TDS≤ 500mg/l, Electrical cond≤ 900, TSS≤ 30mg/l, Total Alk≤ 80, Chloride content ≤ 200mg/l




Table 2: Comparison of mean values of Physicochemical Parameters of Well Water in Okene and Adavi Local Government Areas of Kogi State During Wet Season.

	Okengwe Central	Obehira	Ageva	Agasa	Okene Central	Irigony (Adavi)	Adavi Central	Kabba Junction Area	Naqazi	Ogaminana central
Temp (°C)	25.50±0.38 ^a	28.17±0.47 ^a	26.58±0.29 ^a	27.58±0.15 ^a	27.92±0.28 ^a	28.33±0.53 ^a	27.42±0.29 ^a	27.92±0.23 ^a	28.33±0.40 ^a	27.75±0.28 ^a
pH	6.72±0.11 ^a	6.72±0.09 ^a	6.83±0.14 ^a	6.73±0.08 ^a	7.23±0.13 ^a	6.88±0.11 ^a	6.87±0.04 ^a	6.98±0.06 ^a	7.08±0.08 ^a	6.87±0.08 ^a
Turbidity NTU	0.89±0.21 ^a	0.96±0.17 ^a	13.29±1.00 ^a	8.03±2.63 ^a	7.32±3.27 ^a	1.78±0.70 ^a	6.48±1.18 ^a	8.63±0.66 ^a	0.93±0.39 ^a	1.24±0.12 ^a
Total Dissolved Solid	456.17±56.02 ^b	528.33±71.06 ^a	257.92±36.63 ^e	256.64±25.51 ^e	407.42±21.17 ^b	387.00±44.55 ^c	299.58±23.37 ^d	289.11±12.59 ^d	438.50±28.18 ^b	423.58±17.56 ^d
Electrical Conductivity	0.64±0.08 ^a	0.65±0.08 ^a	0.39±0.05 ^a	0.28±0.07 ^a	0.47±0.08 ^a	0.55±0.07 ^a	0.38±0.04 ^a	0.33±0.02 ^a	0.73±0.06 ^a	0.74±0.13 ^a
Total Suspended Solid	21.67±0.94 ^a	20.83±0.56 ^a	21.83±0.84 ^a	30.17±2.30 ^a	21.67±0.89 ^a	21.58±0.92 ^a	27.56±2.44 ^a	32.50±3.72 ^a	28.33±2.97 ^a	27.92±2.71 ^a
Total Alkalinity	37.16±1.13 ^a	28.75±1.39 ^a	25.33±0.97 ^a	21.67±1.67 ^a	36.56±3.35 ^a	42.33±3.82 ^a	17.75±0.95 ^a	28.75±1.86 ^a	32.92±1.44 ^a	27.50±1.69 ^a
Chloride Content	25.94±0.95 ^a	18.13±0.93 ^a	11.74±1.82 ^a	9.50±0.98 ^a	8.77±1.48 ^a	11.39±0.73 ^a	20.53±2.37 ^a	19.84±2.11 ^a	14.76±2.00 ^a	16.34±1.0 ^a

Key: P-value = < 0.001 α = 0.05 means with different superscript alphabets across the row are significantly (p ≤ 0.05) different
 WHO permissible limits; Tem ≤ 40°C, pH ≤ 8.5, Turb ≤ 5NTU, TDS ≤ 500mg/l, Electrical cond ≤ 900, TSS ≤ 30mg/l, Total Alk ≤ 80, Chloride content ≤ 200mg/l

Table 3: Effects of Seasonal variation on the mean values of the Physicochemical Parameters of well water in Okene and Adavi Local Government Areas of Kogi State.

Physicochemical parameters	Season	Values (Wells)
Temperature	Dry	26.63±0.12
	Wet	27.55±0.28
	p-value	0.007*
Ph	Dry	7.17±0.12
	Wet	6.89±0.05
	p-value	0.045*
Turbidity	Dry	1.11±0.32
	Wet	4.95±1.37
	p-value	0.013*

Corresponding author: Etudaye, U.
 ✉ upahietudaye@yahoo.com
 National Biotechnology Research and Development Agency, Abuja, Nigeria.
 © 2024. Faculty of Technology Education. ATBU Bauchi. All rights reserved.



Physiochemical parameters	Season	Values (Wells)
Total Dissolved solids	Dry	345.2±43.87
	Wet	374.4±29.53
	p-value	0.588**
Electrical conductivity	Dry	0.51±0.12
	Wet	0.52±0.05
	p-value	0.931**
Total suspended solid	Dry	3.67±0.83
	Wet	25.41±1.37
	p-value	0.001*
Total alkalinity	Dry	31.89±2.51
	Wet	29.87±2.37
	p-value	0.566**
Chloride Content	Dry	24.84±2.96
	Wet	15.69±1.74
	p-value	0.016*

Keys: * means significant at $P \leq 0.05$ ** means not significant
WHO permissible limits; $T_{em} \leq 40^\circ\text{C}$, $\text{pH} \leq 8.5$, $\text{Turb} \leq 5\text{NTU}$, $\text{TDS} \leq 500\text{mg/l}$, $\text{Electrical cond} \leq 900$, $\text{TSS} \leq 30\text{mg/l}$, $\text{Total Alk} \leq 80$, $\text{Chloride content} \leq 200\text{mg/l}$

DISCUSSION

Well types with respect to WHO standard

The form, structure, topography and activities around the wells, could have a great impact on the bacteriological quality of the wells and constitute a great health risk to the populace. Only 13% (5) of the well surveyed complied with WHO standard. World Health Organisation's standard states that, a well should be at least 30 m away from septic pit, latrine or soak – away. 87% (35) did not meet this standard. It has been reported that latrines and soak away are great sources of contamination to ground water due to seepage and leakages (Olukosi, *et al.*, 2008).

Though, a good percentage of the wells 39 (98%) had well casing, there were however cracks observed in 70% (27) during the survey. These cracks may have aided exchange of contents between most of the wells and septic tanks, since 87% of the well share good proximity to the location of the septic tank. Again 78% (31) had well cover but about 50% (19) of these well covers were either rusted or had openings into the well. Contamination of the well could have been possible through these observed openings on the covers of the well.

Ninety-five percent (95%) of the wells surveyed were used as drinking water source.

Other uses includes but not limited to bathing, washing of clothes, kitchen utensils and ablution. Only about 5% of the people treat the water by boiling it before drinking. It is imperative to note that, besides drinking of contaminated water, disease can be contracted through the use of contaminated water for washing fruits, vegetables, cooking and eating utensils (Stewart-Koster *et al.*, 2024).

Physicochemical Parameters of the Wells


The Temperature of all the sampled wells from the ten sample locations that make up the two local government areas were within WHO prescribed limit but slightly higher than the limit prescribed by NAFDAC. From the analysis, the temperature has a mean and a coefficient of variation of 26.63°C and 0.12 for dry season as against a mean and coefficient of variation 27.55°C and 0.28 for wet season. This shows that the temperature of the well water is higher in wet season than in dry season. It is not unconnected with the ambient temperature of the environment. This finding disagrees with the work of Singh *et al.*, (2024) where they discovered that the mean and coefficient off variation of temperature for well water is higher in dry season than in wet season.

Corresponding author: Etudaye, U.

upahietudaye@yahoo.com

National Biotechnology Research and Development Agency, Abuja, Nigeria.

© 2024. Faculty of Technology Education. ATBU Bauchi. All rights reserved.



The finding however agrees with the work of Aremu *et al.*, (2011), Ibrahim and Ajibade, (2012) on the ground that the values of temperature for well water are within the prescribed limit of WHO guideline.

PH, Total Alkalinity, Total Suspended Solid, Chloride Content and Electrical conductivity were within the limits specified by NAFDAC and WHO standard. This agrees with the findings of Aremu *et al.* (2011) where he reported that the mean values for PH, Total Alkalinity, Total Suspended Solid, Chloride Content and Electrical Conductivity of well water align with the range and they fall within the limit prescribed by World Health Organisation's standard.

Turbidity for all the ten sample locations were within limit during the dry season but about five locations (50%) namely, Ageva (13.23NTU), Agasa (8.03 NTU), Okene Central (7.32 NTU), Adavi Central (6.48 NTU) and Kabba Junction Area (8.63 NTU) showed values of turbidity higher than the permissible limits WHO standard (5NTU) (WHO, 2008) during the wet season. This high turbidity during wet season may have been due to run off of both organic and inorganic particulate matter into the wells during rainy season. This agrees with the findings of Ibrahim and Aibade (2012) and Singh *et al.*, (2024) where they discovered that 60% and 75% of their respective well sample sites had turbidity values higher than the permissible limits prescribed by both NAFDAC and WHO. High turbidity could prevent microorganisms from the effect of disinfection and aid bacterial proliferation.

Mean values for total dissolved solid for wells from the ten sample locations are within range and comply with the limits permissible by NAFDAC. However, Obehir sample site had Total Dissolved Solid mean value of 524 ± 1.22 mg/l in dry season and 528.33 ± 71.06 mg/l in wet season which are higher than the permissible limit of 500mg/l. this finding agrees with the value reported by Aremu *et al.* (2011) where a high TDS mean value of 1048.67mg/l was observed. This may have been due to differences in organic matter that remain as residue in the wells.

In conclusion, the study revealed that, hygienic practice around the wells in Okene and

Adavi local government areas of Kogi State, Nigeria is poor and the siting of the wells were not in conformity with WHO standard. However, the physicochemical Parameters are relatively within the limits specified by WHO and NAFDAC. It was recommended that, the inhabitants of the study area should not consume well water without proper treatment such as boiling at 100°C. Also, there may be need to close some wells especially those that are very close to septic tank with cracked or no well casing. Wells should be constructed properly with cemented walls, well casing and situated far away from livestock and domestic animals, gutters, latrines, soak – away and other sources of contamination

REFERENCES


- Aboh, E. A., Giwa, F. J. and Giwa, A. (2015). Microbiological assessment of well water in Samaru, Zaria, Kaduna state, Nigeria.
- Ahmed, S., Haruna, A. and Abubakar, U. Y. (2013). Assessment of Wash-Borehole Water Quality in Gombe Metropolis, Gombe State, Nigeria. *Journal of Environment and Earth Science*, 3(1):65-71.
- Aremu, M. O., Oalofe, O., Ikohkoh, P. P. and Yakubu, M. M. (2011). Physiochemical characteristics of stream, well and borehole water sources in Eggon, Nasarawa state, Nigeria. *Journal of chemical society, Nigeria*. 236 (1): 131-136.
- Bassem, M. R. (2013). Maximum chelation therapy rate after the application of dimercapto succinic acid (dmsa) combined with magnetic treated water (mtw) as drinking water. *International Journal of pharmaceutical and biological sciences*. 4(1): 443-454.
- EL-Jakee, J., Moussa, E. I., Mohamed, K. F. and Mohamed, G. (2009). Using molecular techniques for characterization of *Escherichia coli* isolated from water sources in Egypt. *Journal of global veterinarina*. 3(5): 354-362.
- Esemikose, E. E. and Akoji I. G. (2014). Microbiological and Physicochemical

Corresponding author: Etudaye, U.

✉ upahietudaye@yahoo.com

National Biotechnology Research and Development Agency, Abuja, Nigeria.

© 2024. Faculty of Technology Education. ATBU Bauchi. All rights reserved.



- Studies on Water Pollution of Ogane-Aji River. *Journal of Science & Multidisciplinary Research*, 2:41-46.
- Hongeu, D., Haixia, Z., Jinying, Z., Huangmin, G., Nianzhi, J., Xiwu, L., Chuanlun, Z. and Martin G. K. (2013). Thaumarchaeotal signature gene carbon, nitrogen and phosphorus cycles? Metabolic intersection of the marine South China Sea: an indicator of the metabolic intersection of the marine carbon, nitrogen, and phosphorus cycles. *Journal of applied and environmental microbiology*, 79(7): 2136-2137.
- Ibrahim, S. I. and Ajibade, L.T. (2012). Assessment of water quality and domestic uses in medium-sized towns of Niger state, Nigeria. *Transnational Journal of Science and Technology*, 2(5): 63-75.
- Olukosi O. M., Ameh, J. B., and Abdullahi, I. O. (2008): the prevalence of *E. coli* 015:H7 in well water in Zaria metropolis, Kaduna state, Nigeria.
- Shittu, O. B., Olaitan, J. O. and Amusa, T. S. (2008). Physico-chemical and Bacteriological Analysis of Water used for Drinking and Swimming Purposes in Abeokuta, Nigeria. *African Journal of Biomedical Research*, 11: 285-290.
- WHO (2008) WHO guidelines for drinking water quality, incorporating the first and second addenda volume 1. Recommendations. World Health Organization, Geneva, pp. 668.
- Singh, S., Sharma, P., Pal, N., Sarma, D. K., Tiwari, R., & Kumar, M. (2024). Holistic one health surveillance framework: synergizing environmental, animal, and human determinants for enhanced infectious disease management. *ACS Infectious Diseases*, 10(3), 808-826.
- Stewart-Koster, B., Bunn, S. E., Green, P., Ndehedehe, C., Andersen, L. S., Armstrong McKay, D. I., ... & Zimm, C. (2024). Living within the safe and just Earth system boundaries for blue
- water. *Nature Sustainability*, 7(1), 53-63.

Corresponding author: Etudaye, U.

✉ upahietudaye@yahoo.com

National Biotechnology Research and Development Agency, Abuja, Nigeria.

© 2024. Faculty of Technology Education. ATBU Bauchi. All rights reserved.